




A140 FULLY RUGGED TABLET

- 14" FHD / HD LumiBond[®] 2.0 Display with Getac Sunlight Readable Technology for unprecedented viewing experience
- Dual battery design with LifeSupport[™] Battery Swappable Technology
- Enhanced Security with TPM2.0, NFC / RFID and Fingerprint Scanner
- Optional 1D / 2D Imager Barcode Reader and RFID
- Multi-Function Hard Handle, Hand Straps and Shoulder Straps and Slim-Profile Vehicle Dock for maximum mobile productivity

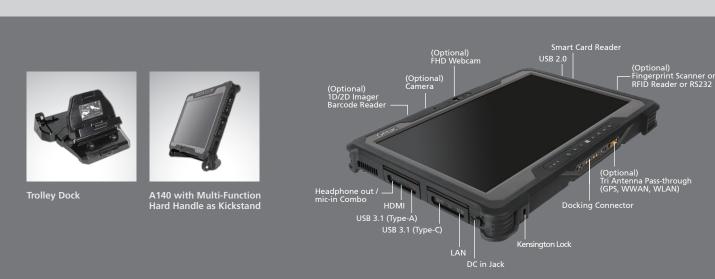

Rugged Mobile Computing Solutions

Specifications

Generation G2

Operating System Windows 10 Pro

Mobile Computing Platform

Intel® Core[™] i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache

Platform Options: Intel® Core[™] i5-10310U Processor 1.7GHz Max. 4.4GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache

Intel® Core[™] i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache Intel[®] Core[™] i7-10610U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology

- 8MB Intel[®] Smart Cache

VGA Controller Intel® UHD Graphics

Display

14" TFT LCD HD (1366 x 768) Protection film 1000 nits LumiBond[®] display with Getac sunlight

readable technology Capacitive multi-touch screen Optional: 14" IPS TFT LCD FHD (1920 x 1080) 800nits LumiBond® display with Getac sunlight readable technology and capacitive multi-touch screen **Storage & Memory**

8GB DDR4

Optional: 16GB / 32GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB PCIe NVMe SSD

Kevboard Power button

7 tablet programmable buttons

Pointing Device Touchscreen

- Capacitive multi-touch screen

Expansion Slot

LAN (RI45) x 1 Optional: 1D / 2D imager barcode reader Optional: Serial port, i or HF RFID, or fingerprint scanner, or HF RFID+fingerprint scanner

I/O Interface

Headphone out / mic-in combo x 1 DC in Jack x 1 USB 2.0 x 1 USB 3.2 Gen 2 Type-A x 1 USB 3.2 Gen 2 Type-C x 1 HDMI x 1 Docking Connector x 1 Optional: FHD webcam x 1 Optional: RF antenna pass-through for GPS, WLAN and WWAN Optional: 8M pixels auto focus rear camera x 1

Communication Interface

10/100/1000 base-T Ethernet x 1 Intel® Wi-Fi 6 AX201, 802.11ax Bluetooth (v5.1) Optional: Dedicated GPSⁱⁱ Optional: 4G LTE mobile broadband

Security Feature

TPM 2.0 Smart Card reader Kensington Lock Optional: HF RFID Opional: Fingerprint reader

Power

AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-lon smart battery (10.8V, typical 3220mAh; min. 3120mAh) x 2 LifeSupport[™] battery swappable technology

Dimension (W x D x H) & Weight

369 x 248 x 32.5 mm (14.58" x 9.76" x 1.279"), 2.3 kg (5.07 lbs)ⁱⁱⁱ

Rugged Feature

MIL-STD-810H certified and IP65 certified MIL-STD-461G certified ^w Vibration & 4 feet drop resistant e-Mark certified for vehicle usage Optional: ANSI / ISA 12.12.01

Environmental Specification

Temperature

Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F Humidity 95% RH, non-condensing

Pre-installed Software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager^{vi} Optional: Absolute Persistence® Accessorie

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC Adapter (65W, 100-240VAC) Capacitive Stylus Optional:

Carry Bag Battery (11.1V, typical 2100mAh; min. 2040mAh) Multi-bay Charger (Dual Bay) Multi-Bay Charger (Eight-Bay) AC Adapter (65W, 100-240VAC) Office Dock AC Adapter (90W, 100-240VAC) MIL-STD-461 Certified AC Adapter (90W, 115.230VAC) 115-230VAC) Vehicle Adapter (120W, 11-32VDC) Capacitive Stylus Protection Film X Strap Shoulder Strap (2-point) Vehicle Dock Office Dock

100W Type-C Adaptor vii

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days Standard

3 years Bumper-to-Bumper

- Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is
- operating in the area. Supports GPS and Glonass. iii Weight varies from configurations and
- Milestructure of the second se
- Do not support the configurations with Discrete Graphic Card. vii

Fully Rugged **Tablet**



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	
Display Port		1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB x 4	USB x 3
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	
Printer Port		1



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel : +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved tion provided herewith is for reference only available specification shall be subjected to quotation by request. V01M03Y21UK